


WIRELESS ALARM SYSTEM

elegant pro series

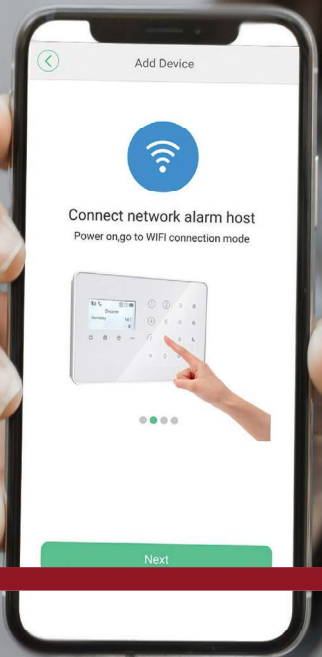

ELEGANT PRO SERIES

WIFI/3G/GPRS/SMS NETWORK ALARM PANEL

W7 smart wireless alarm system adopts the up-to-date digital sensor and transfer technology, which integrates burglar, and fire/gas protection for smart alarm system.

WIRELESS PIR DETECTOR

Micro-power design, battery Low power alert, anti-electromagnetism interference, temperature compensation.

SECURITY ACTIVE MINI RFID TAG

The memory chip on the RFID tag contains a unique identification code, which can be sent securely when placed near proximity of the RFID reader of the panel.

WIRELESS REMOTE CONTROL

The remote control has four buttons, which have arm, disarm, home arm and SOS.

MAGNETIC DOOR SENSOR

Micro power consumption, high stability, long distance. The door sensor can be installed on door, window which makes it ideal for use in banks, villas, home residences, factory buildings, markets, stores.





WIRELESS OUTDOOR SIREN

SMART , Elegant appearance, Multi LED colors indicator ,High alarm sound and also used as a repeater

WIRELESS SMOKE -HEAT DETECTOR

A photoelectric smoke and heat detector with a unique structure design

WIRELESS INDOOR IP CAMERA

This is our latest network camera with built-in passive infrared sensor, High resolution , clear image and video

WIRELESS KEYPAD

Support multiple users, chargeable built-in high capacity lithium battery , and up to 8 RFID cards

ST-W7

WIFI/3G/GPRS/SMS NETWORK ALARM PANEL



TECHNICAL SPECIFICATIONS

Alarm Communication ways	Alarm signal transmitted via WIFI/3G/SMS network	GSM Emission Frequency	≤2W(850/900MHz), ≤1W(1800/1900MHz)
Message Push	Arm/Disarm, System information, Alarm information	Standby Battery	3.7V/800mAh
GSM workingFrequency	850MHz, 900MHz,1800MHz, 1900MHz	Number of Zones	32 wireless zones , 1 wired zone
Receiving/ Emission Frequency	433 MHz	Working Temperature	-10°C +50°C
Size	195mm×136mm×31mm(L×W×H)	Working Humidity	40 -70%
Power	AC 100V-240V	Emission Distance	≤300meters

KEY FEATURES



Integrated RFID reader, users can arm / disarm the alarm system using the RFID tag



Integrated child safety function effectively prevents the malfunctioning of the alarm system by children.



On screen temperature display



Quick dialing , for 4 numbers or direct call by inputing numbers on keypad